

## DSS Foam Dock Seal with Head Pad

## **Product Specifications**




## **DESIGN HIGHLIGHTS**

- Provides a positive seal between internal and external environments. Prevents
  the passage of dust, insects, exhaust fumes and other airborne particulate
  matter while the loading dock is in use
- Roll-formed, galvanized steel framing with 5 year warranty
- Endurance tested foam core is continuously bonded to frame surface with flexible, non-flammable adhesive
- A wide selection of durable coated fabrics provide maximum durability
- Highly resilient, open-celled polyurethane foam keeps original shape and compresses easily to extend the seal life
- Side pad bottoms are tapered to avoid pinching and wear
- All pads are vented for air and moisture release
- Full length yellow stripes guide drivers to the dock
- Heavy-duty, galvanized steel mounting brackets included

APPLICATION DATA			
Door width: ftin.			
Door height:in.			
Dock height:ftin.			
Bumper protection*: in.			
(*Includes bumper projection and any building wall/foundation offset or cantilever)			

TRUCKS AND TRAILERS SERVICED			
Width: Max Min.			
Height: Max Min.			
Length: Max Min.			
Hydraulic tailgate: 🗌 Yes 🔲 No	Rear step section: $\square$ Yes $\square$ No		
Tailgate/step section size:in	Yard jockeys: 🗌 Yes 🔲 No		
DDO IFOT INFORMATION			
PROJECT INFORMATION			
JOB NAME			
ADDRESS			
GENERAL CONTRACTOR			
DISTRIBUTOR			
QUANTITY			
CERTIFIED FOR CONSTRUCTION			
BY			
COMPANY			
ADDRESS			
DATE			

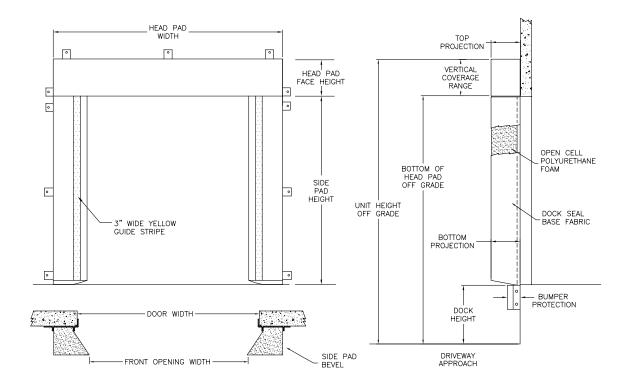

Quantity	Model:	□ DSS
Head Pad Width:	(Tota	al inches)
Head Pad Back/Face:	□ 12/12	$\square$ 18/18 $\square$ 24/24 $\square$ 12/15 $\square$ 12/18 $\square$ Wearmaster head pad
Drop Curtain:	☐ None	☐ 12" ☐ 18" ☐ 24" ☐ Velcro strips ☐ Full width
Side Pad Height:	(Total	inches)
Side Pad Back/Face:	□ 12/12	□ 6/10       □ 8/12       □ 10/12       □ 10/15       □ 8/15       □ 12/15       □ 10/18       □ 6/14
Base Material:	☐ 22 oz. v	vinyl 🗌 40 oz. vinyl 🔲 16 oz. CSM 🔲 40 oz. CSM 🔲 TS-55®
Color: 🗌 Bla	ick 🗌 Tan	☐ Brown ☐ Blue ☐ Green
Taper: ☐ Tapered ☐	Non-Tapered	
Top Projection: 8	. 🗌 10"	□ 12"     □ 14"     □ 16"     □ 18"     □ 20"     □ 22"     □ 24"
Bottom Projection: 8	<i>'</i> □ 10"	□ 12"     □ 14"     □ 16"     □ 18"     □ 20"     □ 22"     □ 24"
Bottom Flaps:	one 🗌 3"	☐ 6" ☐ Inside ☐ Inside & front ☐ All 3 sides
Blockout:	one 🗌 Top p	projection" Bottom projection"
Wear Pleats:	one 🗌 WP4	☐ WP8 ☐ WP16 ☐ Side pads ☐ Head pad corners
Material:	] 22 oz. vinyl	☐ 40 oz. vinyl ☐ 40 oz. CSM ☐ TS-55®
Color:	] Black 🔲 Ta	an 🗌 Brown 🗌 Blue 🔲 Green
Wear Face: None	$\square$ Head pad	☐ Side pad
Material:	] 22 oz. vinyl	☐ 40 oz. vinyl ☐ 40 oz. CSM ☐ TS-55®
Color:	Black 🗌 Ta	an 🗌 Brown 🔲 Blue 🔲 Green
Reinforced Inside Face:	] Standard	☐ Side pad full height
Material:	] 22 oz. vinyl	☐ 40 oz. vinyl ☐ 40 oz. CSM ☐ TS-55®
Color:	Black 🗆 T	an □ Brown □ Blue □ Green
Options: Door numb	ers 🗌 Flame	e retardant fabric & foam 🔲 Flame retardant fabric only 🔲 Flame retardant foam only
Side Pad Mounting Brackets	s: None	☐ Flats & angles ☐ Angles ☐ 1 ½" Offsets & Angles



Tel: (55) 4440 0360 WhatsApp: (81) 8363 8981 EMAIL: ventas@bering.com.mx