



# BLOCKADE™ DOCK SHELTER

## MODEL BDS-K

### DOCK SHELTER SPECIFICATIONS



# ENTRE/MATIC

## Product Summary

The Blockade Dock Shelter is designed for the most demanding environmentally controlled dock environments. It is uniquely capable of blocking air and light infiltration around the perimeter of the trailer, while also providing ambient light to enhance loading.

## Design Highlights

- Exclusive AquaShield® AQS-900 Integral Rain Header protects dock from moisture infiltration with a highly resilient foam core and automatic positioning
- Exclusive Hinge Guard™ effectively seals hinge gap along opened trailer doors, is made of High Molecular Weight Polyethylene (HMWPE), and attached securely with industrial hook and loop for easy replacement
- Exclusive LightGuard™ connector curtain blocks air and light infiltration at overlap of side and head curtains.
- Exclusive roll-formed galvanized steel framing
- Head curtain wear pleats and bottom wear panels with exclusive SHARC™ (Super High Abrasion Resistant Compound) fabric
- Canopy style rigid head frame increases structural integrity while translucent head member allows operating light
- Impactable foam-filled side members
- Raked header for moisture run-off
- Foam-filled draft pads



## Project Information

Job Name \_\_\_\_\_  
 Address \_\_\_\_\_  
 General Contractor \_\_\_\_\_  
 Distributor \_\_\_\_\_  
 Model \_\_\_\_\_ Quantity \_\_\_\_\_


## Certified For Construction

By \_\_\_\_\_  
 Company \_\_\_\_\_  
 Address \_\_\_\_\_  
 Date \_\_\_\_\_

# BLOCKADE DOCK SHELTER

## MODEL BDS-K

### DOCK SHELTER SPECIFICATIONS

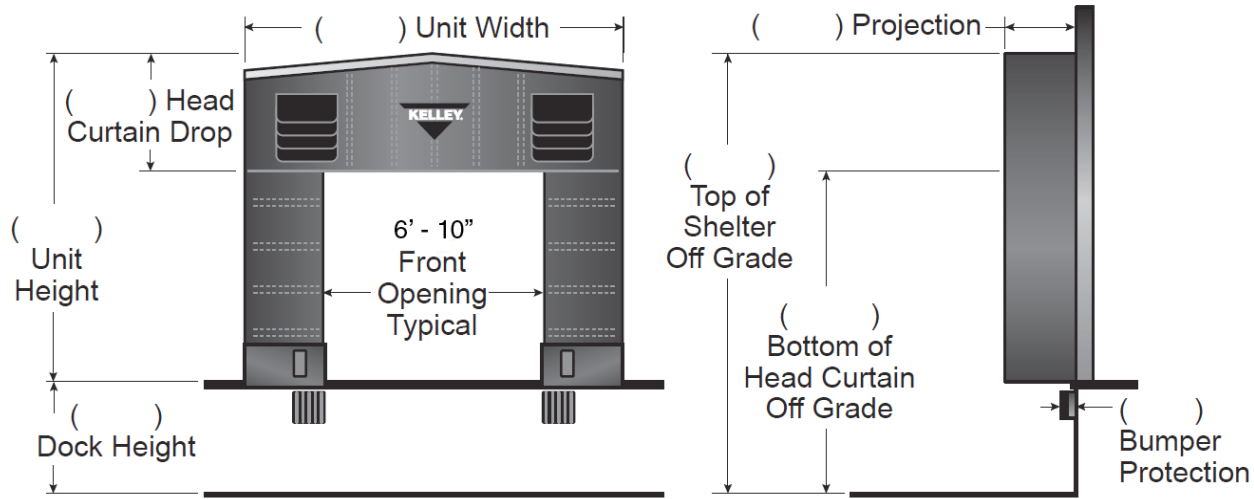

#### TRUCKS AND TRAILERS SERVICED

Width: \_\_\_\_\_ Max. \_\_\_\_\_ Min.  
 Height: \_\_\_\_\_ Max. \_\_\_\_\_ Min.  
 Length: \_\_\_\_\_ Max. \_\_\_\_\_ Min.  
 Type of Trailer:  Standard  Refrigerated  
 [\*Not Applicable for Hydraulic Tailgate, Rear Step Section]

#### APPLICATION DATA

Door Width: \_\_\_\_\_ ft. \_\_\_\_\_ in.  
 Door Height: \_\_\_\_\_ ft. \_\_\_\_\_ in.  
 Dock Height: \_\_\_\_\_ ft. \_\_\_\_\_ in.  
 Bumper Protection\*: \_\_\_\_\_ in.  
 [\*Includes bumper projection and any building wall/foundation offset or cantilever]

#### QUANTITY \_\_\_\_\_

**Drive/Approach**  Level  Incline  Decline \_\_\_\_\_ % of Grade

Please check box from each category:

**Building Wall Structure:**  Metal  Other

**Unit Width:**  11'-6"  11'-7"  11'-10"  12'-2"

**Unit Height:**  11'-0"  11'-6"  12'-0"  12'-6"

**Head Member Style:**  Raked  Flat

**Curtain Material:** 40 oz. Vinyl Standard  40 oz. CSM  TS-55

**Color:** Black Only

**Head Curtain Drop:**  30"  36"  42"  48"  54"  \_\_\_\_\_"

**Taper:**  Yes  No

**Top Projection:**  23"  24"  25"  26"  27"  28"  29"  30"  31"  32"  
 33"  34"  35"  36"  37"  38"  39"  40"  41"  42"

**Bottom Projection:**  23"  24"  25"  26"  27"  28"  29"  30"  31"  32"  
 33"  34"  35"  36"  37"  38"  39"  40"  41"  42"

**Options:**  Door Numbers  Full Length Guide Stripes

\*Conversions: To convert measurements to metric, see formulas below:

Inches x 25.4 = millimeters (Example: 4" x 25.4 = 101.6 mm)

Feet x .3048 = meters (Example: 12' x .3048 = 3.66 m)

\*Note: Consult factory for blockout application assistance.