



FLEXFRAME® Dock Shelter

Product Specifications



DESIGN HIGHLIGHTS

- Side frames covered with white 18 oz. coated vinyl to transmit natural light into the loading area
- Overlapping layers of fabric provide more wear resistance against the sharp corners of the trailer, extending the life of the shelter
- Raked header permits weather drainage (flat header is used when shelter is protected by a hood or canopy)
- Roll-formed galvanized steel framing
- Fiberglass stays add stiffness to shelter face curtains

APPLICATION DATA

Door width: _____ ft. _____ in.

Door height: _____ ft. _____ in.

Dock height: _____ ft. _____ in.

Bumper protection*: _____ in.

(*Includes bumper projection and any building wall/foundation offset or cantilever)

TRUCKS AND TRAILERS SERVICED

Width: _____ Max. _____ Min.

Height: _____ Max. _____ Min.

Length: _____ Max. _____ Min.

Hydraulic tailgate: Yes No

Rear step section: Yes No

Tailgate/step section size: _____ in

Yard jockeys: Yes No

PROJECT INFORMATION

JOB NAME _____

ADDRESS _____

GENERAL CONTRACTOR _____

DISTRIBUTOR _____

QUANTITY _____


CERTIFIED FOR CONSTRUCTION

BY _____

COMPANY _____

ADDRESS _____

DATE _____

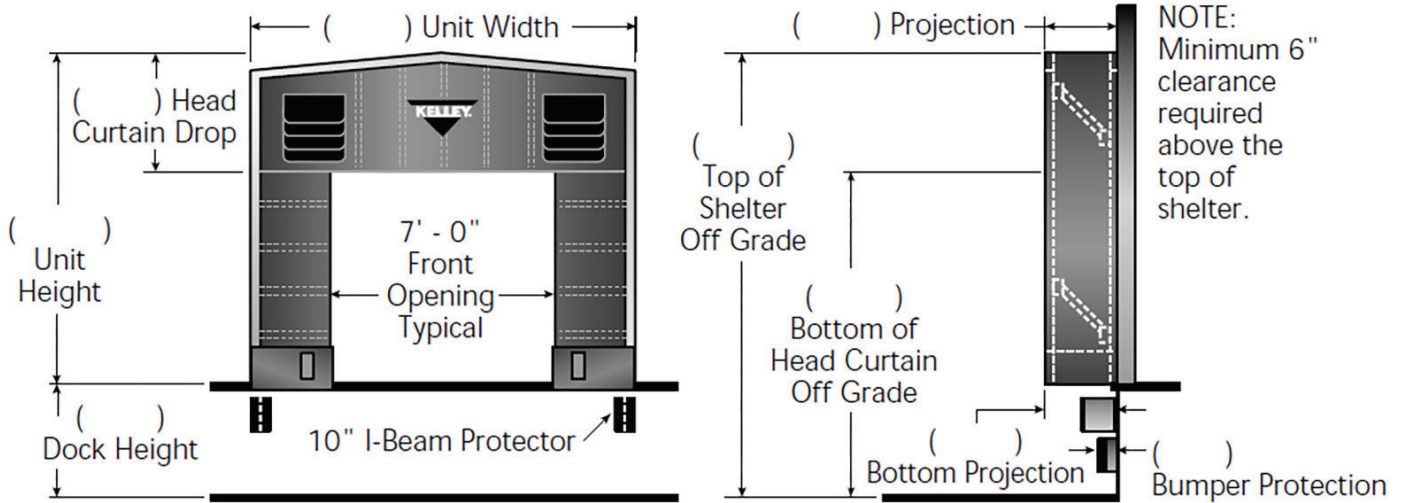

Drive/Approach: Level Incline Decline _____ % grade

Frame: Standard galvanized steel

Building Wall Construction: Metal Other

Unit Width: 11'6" 12'0"

Unit Height: 11'0" 11'6" 12'0" 12'6"

Head Member Style: Raked Flat 45° Sloped

Base Material: TS-55® 40 oz. CSM 40 oz. vinyl 22 oz. vinyl

Color: Black Tan Brown Blue Green

Head Curtain Drop: 30" 36" 42" 48" 54" _____"

Taper: **Yes: Projection Options:** 18" Top/24" Bottom 24" Top/30" Bottom 24" Top/18" Bottom 30" Top/24" Bottom

No: Projection Choice: 18" 24" 30" 36"

Options: None Door numbers Full length guide stripes Pull rope assembly

*Conversions: To convert measurements to metric, see formulas below:

Inches x 25.4 = millimeters (Example: 4" x 25.4 = 101.6 mm)

Feet x .3048 = meters (Example: 12' x .3048 = 3.66 m)