




Engineered for Safety

Pentalift Edge of Dock Leveler

Pentalift edge of dock levelers offer simple and proven designs. This results in unmatched value as well as reliable function and operation.

Pentalift Mechanical Edge of Dock Design Features

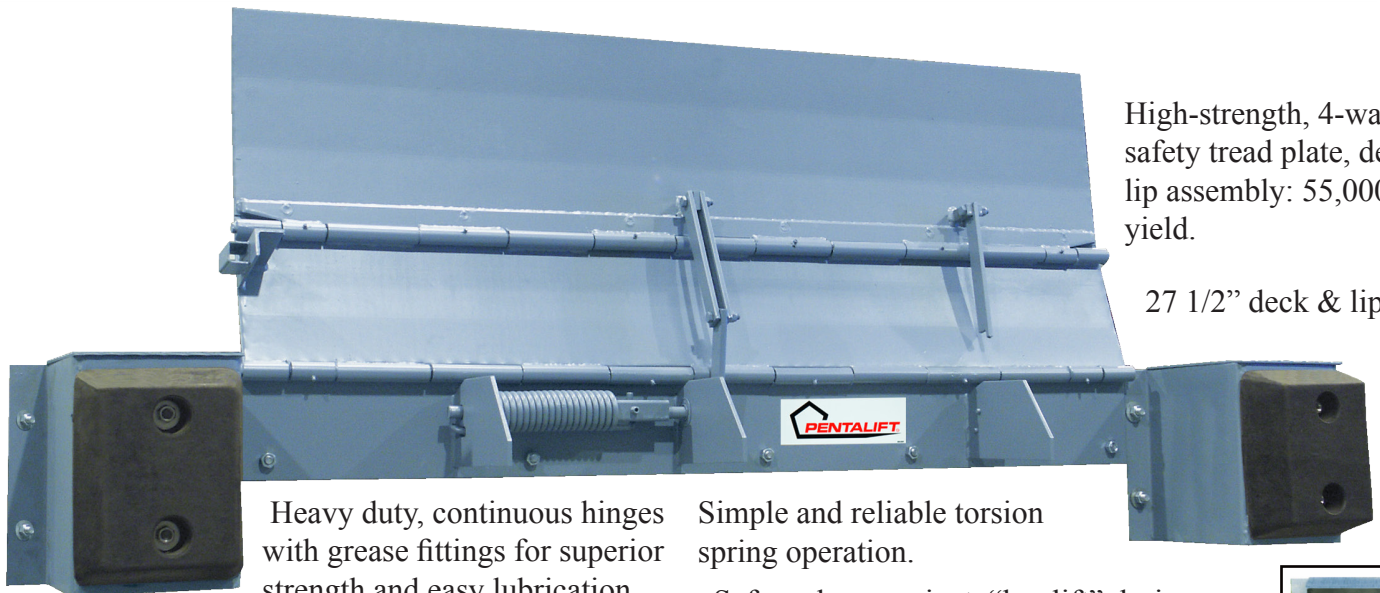


High-strength, 4-way safety tread plate, deck and lip assembly: 55,000 psi yield.

27 1/2" deck & lip span.

Heavy duty, continuous hinges with grease fittings for superior strength and easy lubrication.

Simple and reliable torsion spring operation.

Safe and convenient "bar lift" design allows the edge of dock to be easily tilted back first, and then forward onto the truck. Heavy pulling and pushing is eliminated.

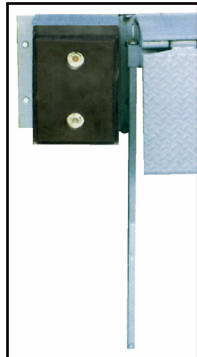

Heavy-duty steel bumper blocks complete with molded rubber bumpers.

+/- 3" effective working range
+/- 5" operating range

Available platform widths: 66", 72", 78" and 84"
Available capacities: 20,000, 25,000, 30,000 lb.

Pentalift mechanical edge of dock easy lift activation



Torsion spring assist and integrated handle result in low effort activation.



The edge of dock lip automatically locks as the deck is extended.



Safety is enhanced through less operational effort. Increased convenience and safer than aluminum dock plates.

PENTALIFT EQUIPMENT CORPORATION



BERING

Tel: (55) 4440 0360
WhatsApp: (81) 8363 8981
EMAIL: ventas@bering.com.mx

Product Bulletin 1117D058
Printed in Canada